


Not pedestrian traffic bearing flat roof, load bearing - protection with gravel fill

Flat roof RS 6.2.2 SBS

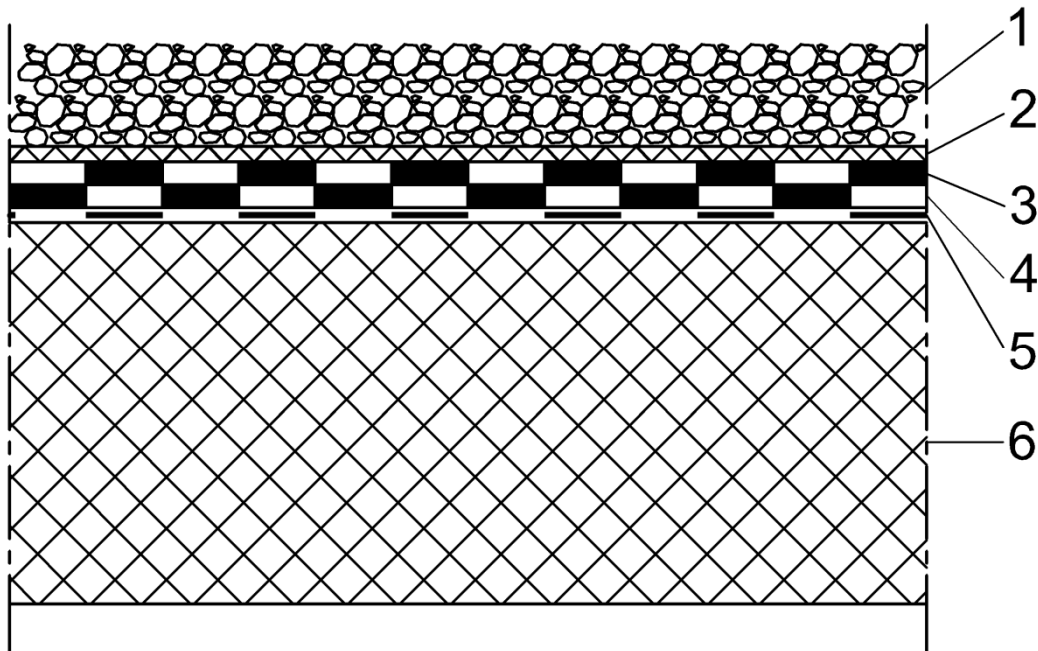

1. River washed gravel granulation 16/32mm and min. thickness of 5cm
2. Separating sheet (PE foil or polyester felt $>200 \text{ g/m}^2$)
3. **IZOELAST P4 PLUS** or **IZOELAST P5 PLUS**, torch applied bituminous membrane, fully torched over lower sheet, according to EN 13707
4. **IZOELAST P4 PLUS** or **IZOELAST T4 PLUS**, torch applied bituminous membrane, partially torched on roof deck, according to EN 13707
5. **IBITOL**, cold applied asphalt coat - primer
6. Load bearing still reinforced concrete construction (min. slope 2%)