


**Not pedestrian traffic bearing flat roof,
load bearing - protection with gravel fill**

Flat roof RS 6.2.2 SELF

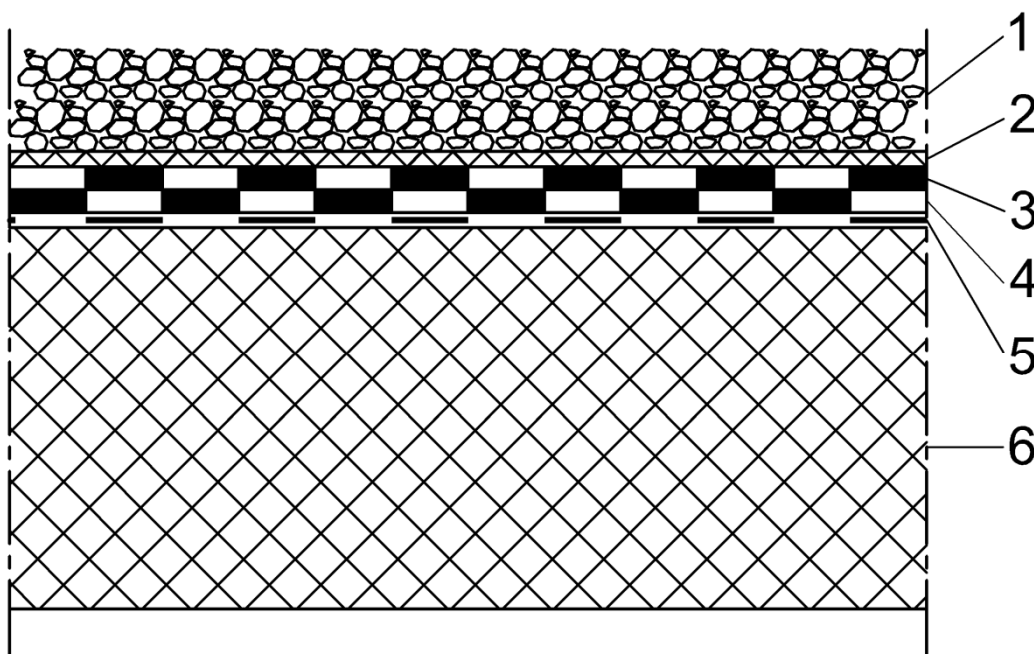

1. River washed gravel granulation 16/32mm and min. thickness of 5cm
2. Separating sheet (PE foil or polyester felt)
3. **IZOELAST P5 PLUS**, torch applied bituminous membrane, fully torched over lower sheet, according to EN 13707
4. **IZOSELF P3**, self adhesive bituminous membrane, cold bonded over roof deck, according to EN 13707 type T
5. **IBITOL**, cold applied asphalt coat - primer
6. Load bearing still reinforced concrete construction (min. slope 2%)