


Pedestrian traffic bearing flat roof, concrete slabs put in sand

Flat roof RS 6.2.3 SBS

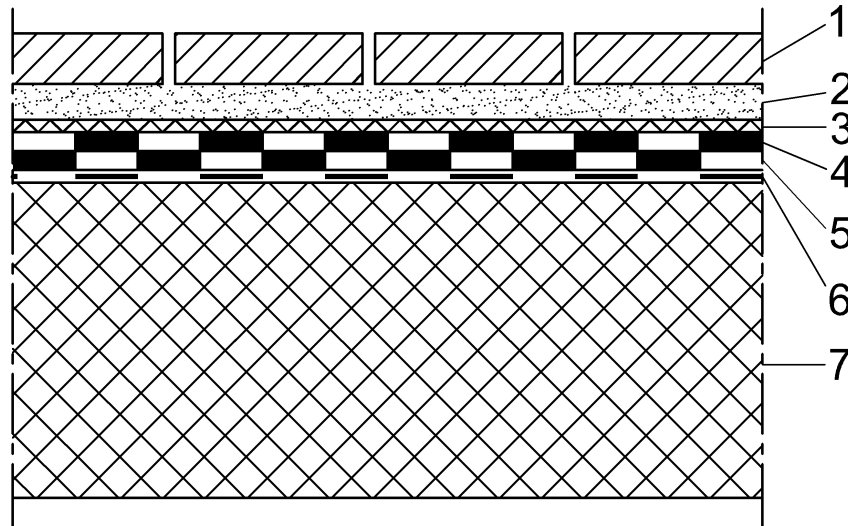

1. Concrete slab
2. River washed gravel granulation 4/8mm and min. thickness of 3cm
3. Separating sheet (PE foil or polyester felt $>200\text{g/m}^2$)
4. **IZOELAST P4 PLUS** or **IZOELAST P5 PLUS**, torch applied bituminous membrane, fully torched over lower sheet, according to EN 13707
5. **IZOELAST P4 PLUS** or **IZOELAST T4 PLUS**, torch applied bituminous membrane, partially torched on roof deck, according to EN 13707
6. **IBITOL**, cold applied asphalt coat - primer
7. Load bearing still reinforced concrete construction (min. slope 2%)