


Pedestrian traffic bearing flat roof, ceramic pavement on concrete screed

Flat roof RS 6.2.4 SBS

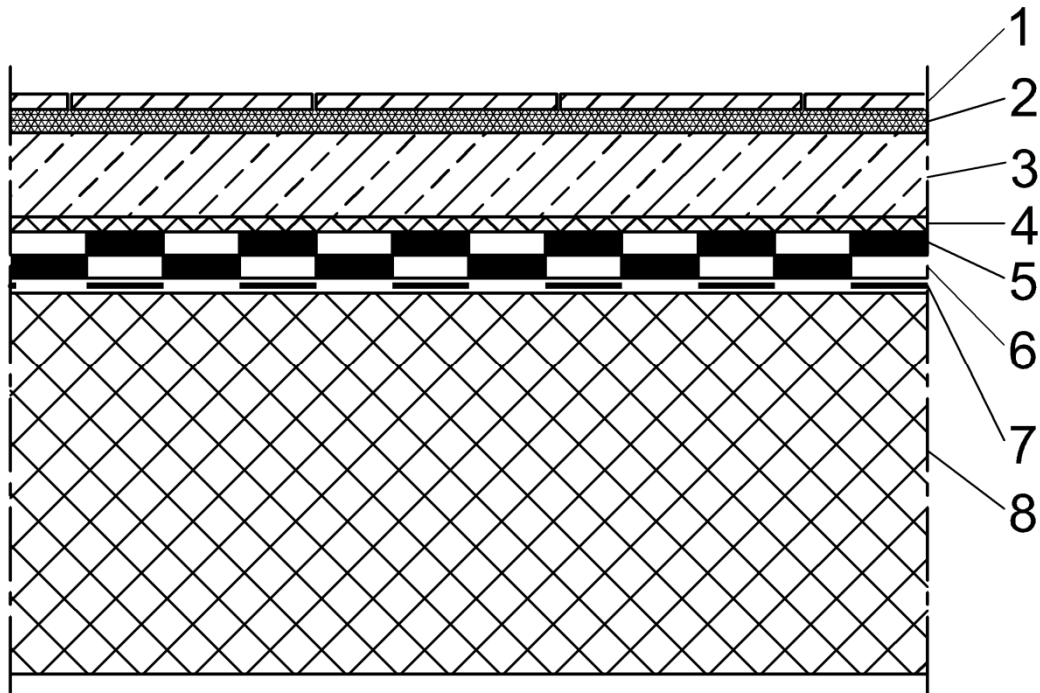

1. Ceramic tiles
2. Ceramic tile adhesive
3. Cement plaster
4. Separating sheet (PE foil or polyester felt $>200\text{g/m}^2$)
5. **IZOELAST P4 PLUS** or **IZOELAST P5 PLUS**, torch applied bituminous membrane, fully torched over lower sheet, according to EN 13707
6. **IZOELAST P4 PLUS** or **IZOELAST T4 PLUS**, torch applied bituminous membrane, partially torched on roof deck, according to EN 13707
7. **IBITOL**, cold applied asphalt coat - primer
8. Load bearing still reinforced concrete construction (min. slope 2%)