


Pedestrian traffic bearing flat roof, ceramic pavement on concrete screed

Flat roof RS 6.2.4 SELF

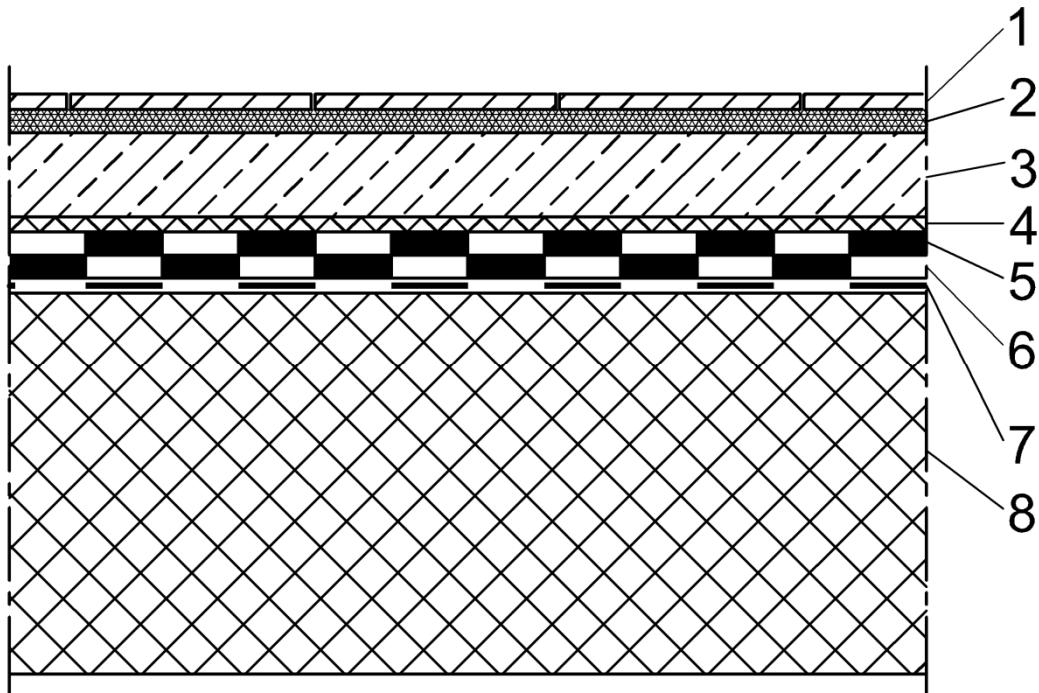

1. Ceramic tiles
2. Ceramic tile adhesive
3. Cement plaster
4. Separating sheet (PE foil or polyester felt >200g/m²)
5. **IZOELAST P5 PLUS**, torch applied bituminous membrane, fully torched over lower sheet, according to EN 13707
6. **IZOSELF P3**, self adhesive bituminous membrane, cold bonded over roof deck, according to EN 13707 type T
7. **IBITOL**, cold applied asphalt coat - primer
8. Load bearing still reinforced concrete construction (min. slope 2%)