


## Inverted flat roof, ceramic pavement on concrete screed

Flat roof RS 6.3.10 SELF

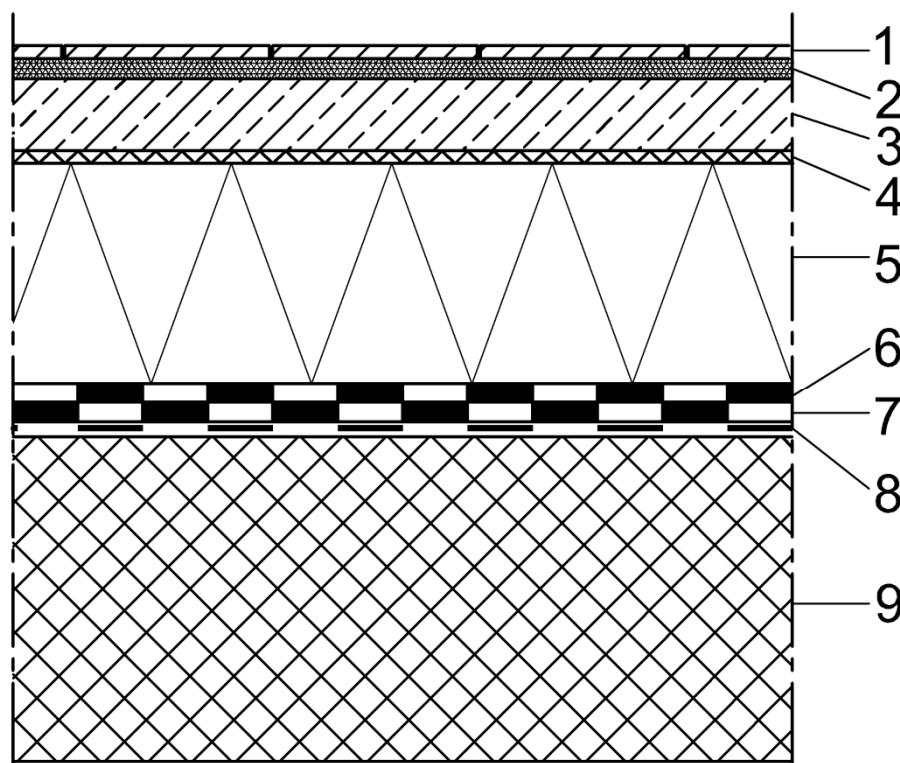

1. Ceramic tiles
2. Ceramic tile adhesive
3. Cement plaster floor
4. Drainage, filter and separating sheet (polyester felt 500 g/ m<sup>2</sup>)
5. **TERMODUR ROOF** or Extruded polystyrene XPS, according to EN 13163, EU Construction Products Directive 89/106/EEC \*
6. **IZOELAST P5 PLUS**, torch applied bituminous membrane, fully torched over lower sheet, according to EN 13707
7. **IZOSELF P3**, self adhesive bituminous membrane, cold bonded over roof deck, according to EN 13707 type T
8. **IBITOL**, cold applied asphalt coat - primer
9. Load bearing still reinforced concrete construction (min. slope 2%)

\* in the turned or duo flat roof, the insulation can be installed only in a single layer