


Trafficable flat roof with expanded polystyrene (EPS)

Flat roof RS 6.3.14 SELF

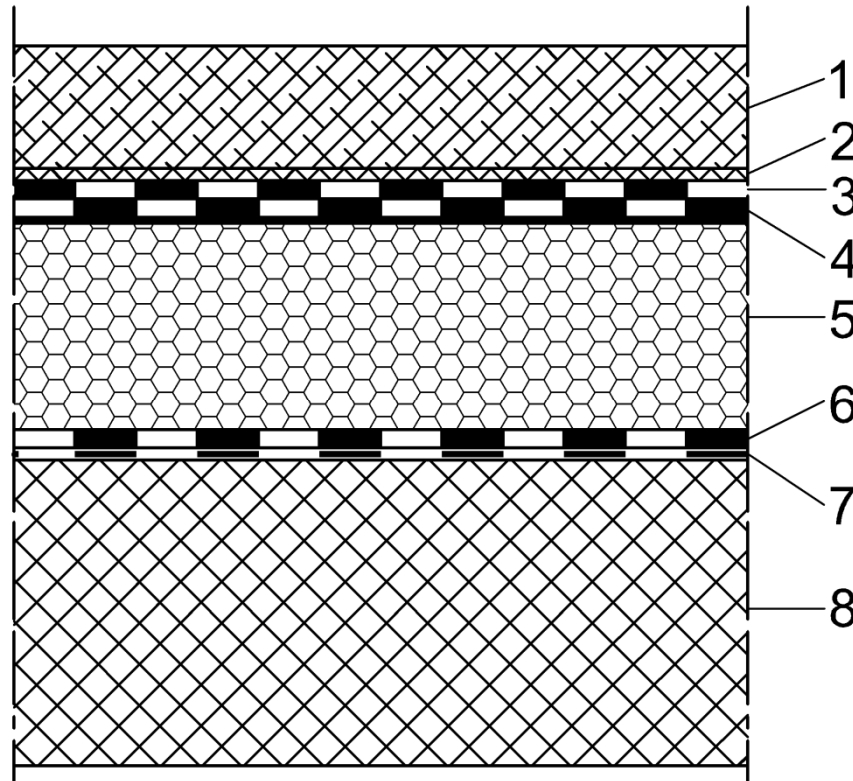

1. Trafficable surface - protecting concrete layer
2. Drainage and separating layer (polyester felt 500 g/m²)
3. **IZOELAST P5 PLUS**, torch applied bituminous membrane, fully torched over lower sheet, according to EN 13707
4. **IZOSELF P3**, self adhesive bituminous membrane, cold bonded over roof deck, according to EN 13707 type T
5. **FRAGMAT EPS 200**, according to EN 13163
6. **BITALBIT SELF**, self adhesive bituminous membrane, cold bonded over roof deck, according to EN 13970
7. **IBITOL**, cold applied asphalt coat - primer
8. Load bearing still reinforced concrete construction (min. slope 2%)