


## Not pedestrian traffic bearing flat roof, protection with gravel fill

Flat roof RS 6.3.2 SELF

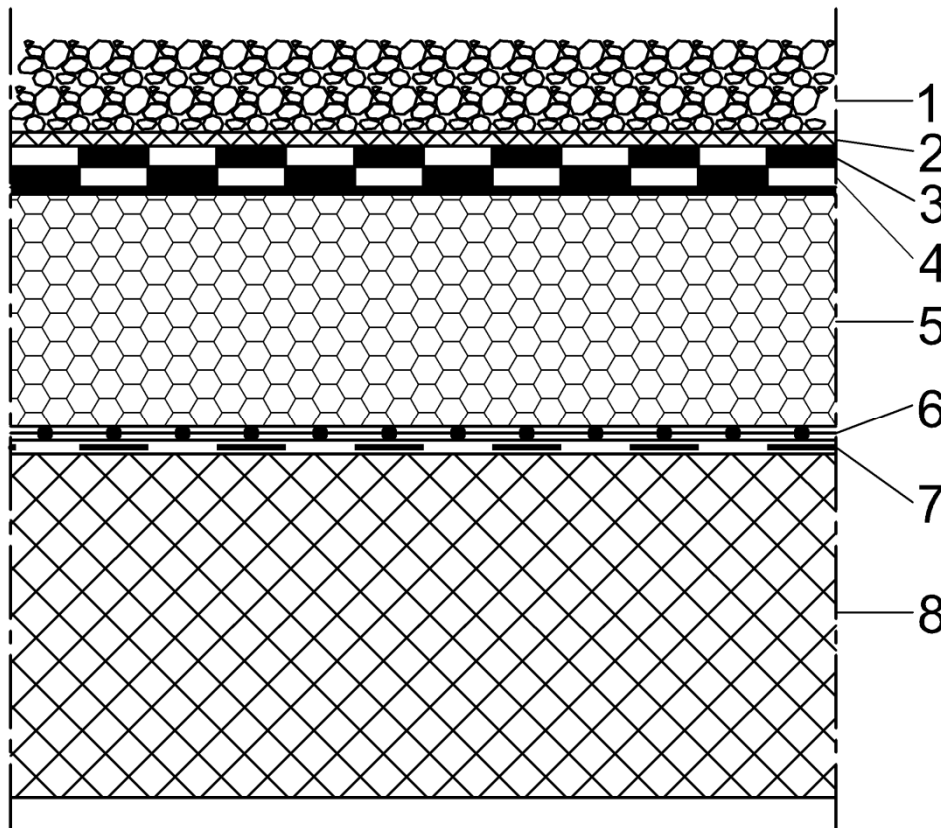

1. River washed gravel granulation 16/32mm and min. thickness of 5cm
2. Separating sheet (PE foil or polyester felt  $>200\text{g/m}^2$ )
3. **IZOELAST P5 PLUS**, torch applied bituminous membrane, fully torched over lower sheet, according to EN 13707
4. **IZOSELF P3**, self adhesive bituminous membrane, cold bonded over roof deck, according to EN 13707 type T
5. **FRAGMAT EPS 100**, according to EN 13163
6. **BITALBIT SELF**, vapour barrier, self adhesive bituminous membrane, cold bonded over roof deck, according to EN 13970
7. **IBITOL**, cold applied asphalt coat - primer
8. Load bearing still reinforced concrete construction (min. slope 2%)