


Not pedestrian traffic bearing industrial flat roof on metal profile deck

Flat roof RS 6.3.3 APP

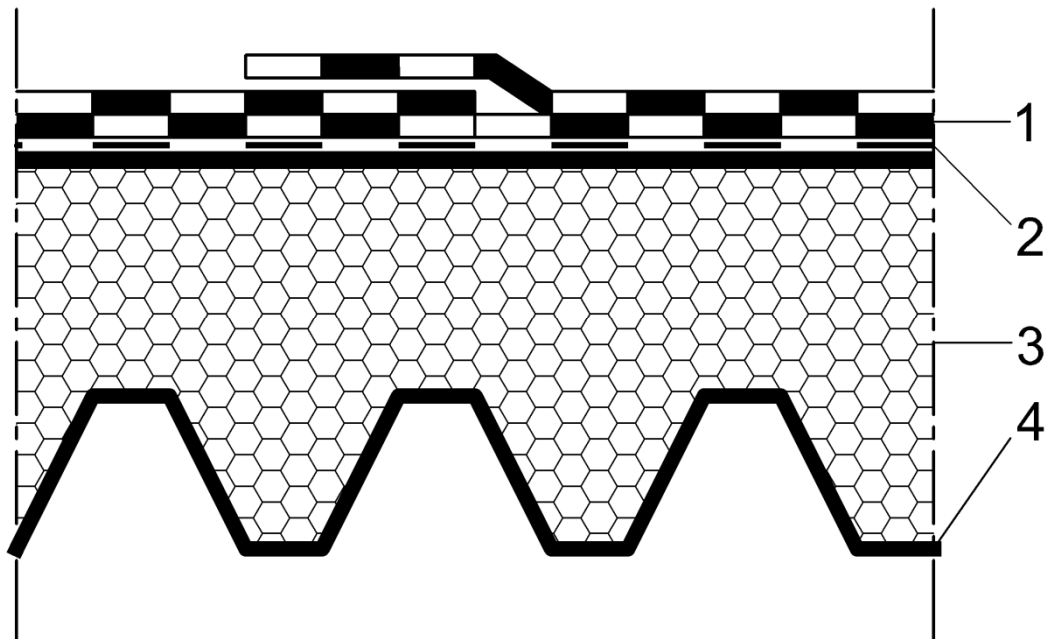

1. **IZOTEKT REFLEX P4** or **IZOTEKT REFLEX P5**, torch applied bituminous membrane, fully torched over lower sheet, according to EN 13707 – final layer
2. **IZOTEKT T4 PLUS**, torch applied bituminous membrane, partially torched on roof deck, according to EN 13707 *
3. **STIROTEKT L1** (**FRAGMAT EPS 100** one side laminated with bituminous cardboard, according to EN 13163) *
4. **IZOSELF AL PLUS**, vapour barrier, one side self adhesive bituminous elastomeric membrane, cold bonded fully torched over lower sheet, according to EN 13970
5. Bearing metal profile deck in slope

* instead of 2. and 3. we can use **STIROTEKT T** (**FRAGMAT EPS 100** one side laminated with **IZOTEKT T4 PLUS**) in combination with point 1.