


Pedestrian traffic bearing flat roof, concrete slabs put into sand

Flat roof RS 6.3.4 SELF

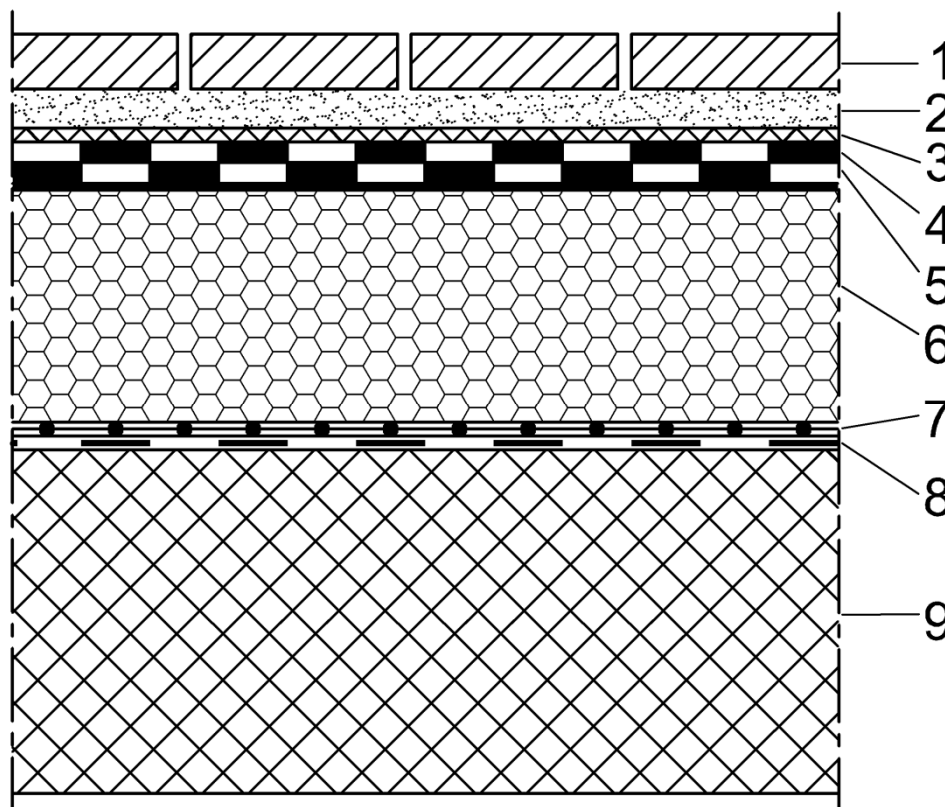

1. Concrete slab
2. River washed gravel granulation 4/8mm and min. thickness of 3cm
3. Separating sheet (PE foil or polyester felt $>200\text{g/m}^2$)
4. **IZOELAST P5 PLUS**, torch applied bituminous membrane, fully torched over lower sheet, according to EN 13707
5. **IZOSELF P3**, self adhesive bituminous membrane, cold bonded over roof deck, according to EN 13707 type T
6. **FRAGMAT EPS 100**, according to EN 13163
7. **BITALBIT SELF**, vapour barrier, self adhesive bituminous membrane, cold bonded over roof deck, according to EN 13970
8. **IBITOL**, cold applied asphalt coat - primer
9. Load bearing still reinforced concrete construction (min. slope 2%)