


Pedestrian traffic bearing flat roof, ceramic pavement on concrete screed

Flat roof RS 6.3.6 SBS

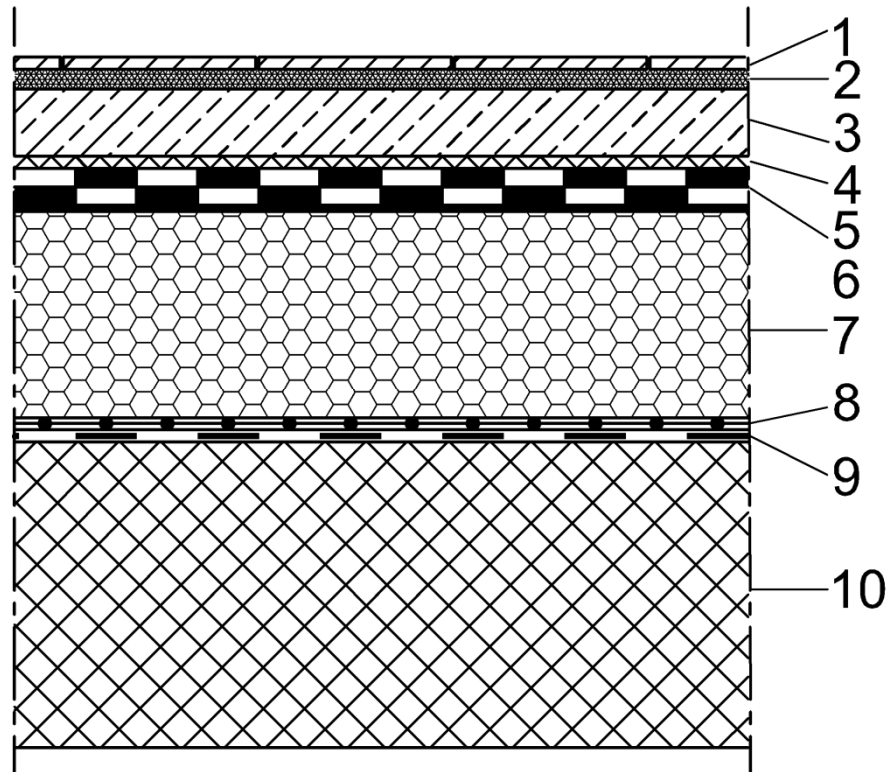

1. Ceramic tiles
2. Ceramic tile adhesive
3. Cement plaster
4. Separating sheet (PE foil or polyester felt >200g/m²)
5. **IZOELAST P4 PLUS** or **IZOELAST P5 PLUS**, torch applied bituminous membrane, fully torched over lower sheet, according to EN 13707
6. **IZOELAST P4 PLUS** or **IZOELAST T4 PLUS**, torch applied bituminous membrane, partially torched on roof deck, according to EN 13707 *
7. **STIROTEKT L1 (FRAGMAT EPS 100** one side laminated with bituminous cardboard, according to EN 13163) *
8. **BITALBIT AL V4** or **BITALBIT SELF**, vapour barrier bituminous sheet, according to EN 13970
9. **IBITOL**, cold applied asphalt coat - primer
10. Load bearing still reinforced concrete construction (min. slope 2%)

* instead of 6 and 7 we can use **STIROTEKT P3 (FRAGMAT EPS 100** one side laminated with **IZOELAST**) in combination with **IZOELAST P5 PLUS**