
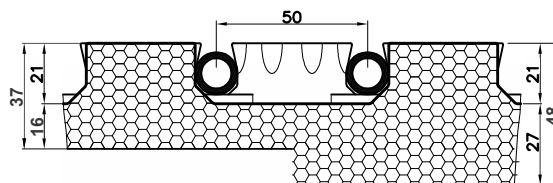
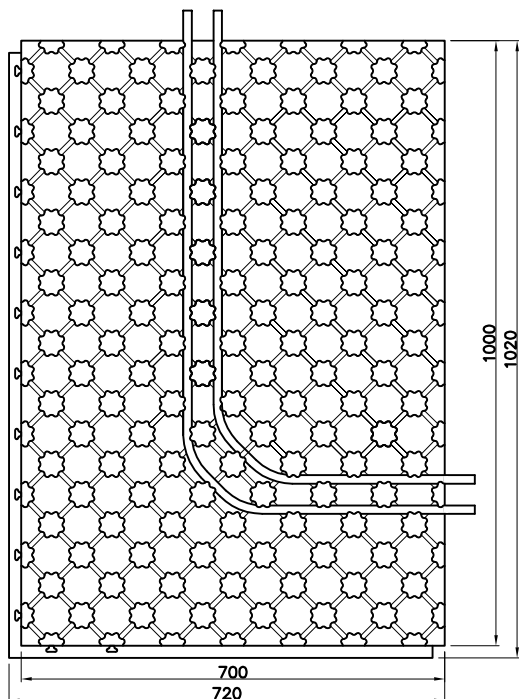


STIROTERMAL CLASSIC 16/27 FRAGMAT

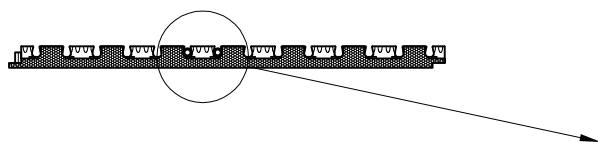

TEHNIČNI PODATKI - TECHNISCHE DATEN - TECHNICAL DATA

Premer cevi – Rohrdurchmesser – Pipe diameter:	14 – 16 mm
Razdalja med cevmi – Verlegeabstand – Pipe spacing:	50, 100, 150, 200 mm
Izolacijski material – Dämmstoff – Insulation material:	EPS
Oznaka – Bezeichnung – Designation:	EPS-EN 13163-L(3)-W(3)-T(2)-S(5)-P(10)-BS115-CS(10)120-DS(N)5-DS(70,-)2
Koristna velikost – Nutzgröße – Usable size:	1000×700 mm
Koristna površina – Nutzoberfläche – Usable surface:	0,7 m ²
Skupna velikost – Gesamtgröße – Total size:	1020×720 mm
Skupna debelina – Gesamtdicke – Total tickness:	37 / 48 mm
Skupna debelina izolacije – Gesamtisolationdicke – Total insulation tickness:	16 / 27 mm
Koeficient toplotne prevodnosti – Wärmeleitfähigkeit – Thermal resistance factor:	0,035 W/(m.K)
Toplotna upornost plošče – Wärmedurchlasswiderstand – Heat admission resistance:	0,45 / 0,75 m ² K/W
Tlačna trdnost (10% def.) – Drückspannung (bei 10% Stauchung) – Compressive stress (10% def.):	120 kPa
Dovoljena obtežba – Zulässige Druckbelastbarkeit – Acceptable load:	24 kPa ≈ 2400 kg/m ²
Temp. obstojnost oblike – Wärmeformbeständigkeit – Heat form resistance:	80 °C
Razred gorljivosti – Brandverhalten – Fire classification – EN 13501-1 / DIN 4102:	E / B1
Folija (material, debelina) – Folie (Stoff, Dicke) – Foil (material, tickness):	PE 0,18 mm
Barva folije – Folienfarben – Foil colour:	črna – schwarz – black
Pakiranje karton [kos] – Verpackung Karton [Stück] – Packaging carton box [pcs] – 107×74×41 cm	Classic 15: 15 → 10,6 m ²
	Classic 27: 10 → 7,0 m ²
Pakiranje PE folija [kos] – Verpackung PE Folie [Stück] – Packaging PE foil [pcs] – 105×72×46 cm	Classic 15: 8 → 12,6 m ²
	Classic 27: 12 → 8,4 m ²