
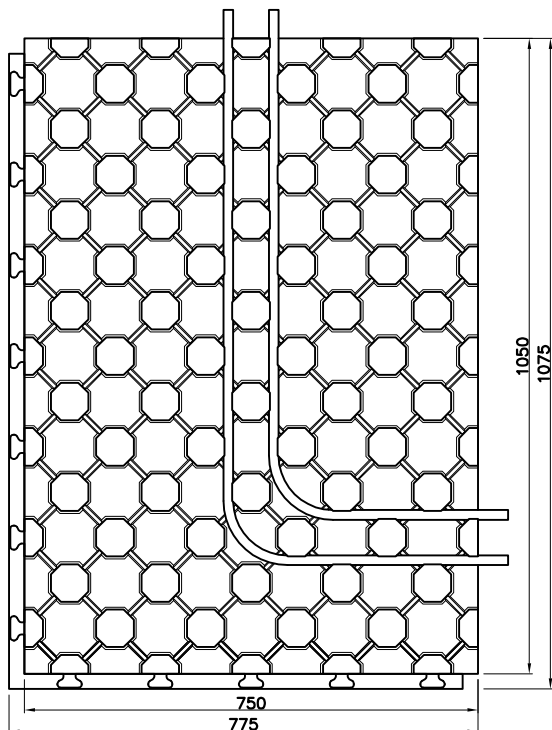
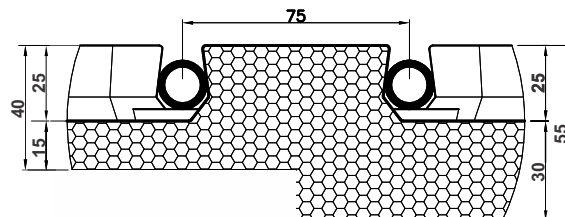


STIROTERMAL BASIC 15/30 FRAGMAT



TEHNIČNI PODATKI - TECHNISCHE DATEN - TECHNICAL DATA

Premer cevi – Rohrdurchmesser – Pipe diameter:	16 – 20 mm
Razdalja med cevmi – Verlegeabstand – Pipe spacing:	75, 150, 225 mm
Izolacijski material – Dämmstoff – Insulation material:	EPS
Oznaka – Bezeichnung – Designation:	EPS-EN 13163-L(3)-W(3)-T(2)-S(5)-P(5)-BS115-CS(10)120-DS(N)5-DS(70,-)2
Koristna velikost – Nutzgröße – Usable size:	1050×750 mm
Koristna površina – Nutzoberfläche – Usable surface:	0,7875 m ²
Skupna velikost – Gesamtgröße – Total size:	1075×775 mm
Skupna debelina – Gesamtdicke – Total tickness:	40 / 55 mm
Skupna debelina izolacije – Gesamtisolationdicke – Total insulation tickness:	15 / 30 mm
Koeficient toplotne prevodnosti – Wärmeleitfähigkeit – Thermal resistance factor:	0,036 W/(m.K)
Toplotna upornost plošče – Wärmedurchlasswiderstand – Heat admission resistance:	0,40 / 0,80 m ² K/W
Tlačna trdnost (10% def.) – Drückspannung (bei 10% Stauchung) – Compressive stress (10% def.):	120 kPa
Dovoljena obtežba – Zulässige Druckbelastbarkeit – Acceptable load:	24 kPa ≈ 2400 kg/m ²
Temp. obstojnost oblike – Wärmeformbeständigkeit – Heat form resistance:	80 °C
Razred gorljivosti – Brandverhalten – Fire classification – EN 13501-1 / DIN 4102:	E / B1
Folija (material, debelina) – Folie (Stoff, Dicke) – Foil (material, tickness):	PE 0,18 mm
Barva folije – Folienfarben – Foil colour:	črna – schwarz – black
Pakiranje karton [kos] – Verpackung Karton [Stück] – Packaging carton box [pcs] – 114,5×79,5×60 cm	Basic 15: 21 → 16,5375 m ²
	Basic 30: 13 → 10,2375 m ²
Pakiranje PE folija [kos] – Verpackung PE Folie [Stück] – Packaging PE foil [pcs] – 114×78×45 cm	Basic 15: 14 → 11,025 m ²
	Basic 30: 10 → 7,875 m ²